


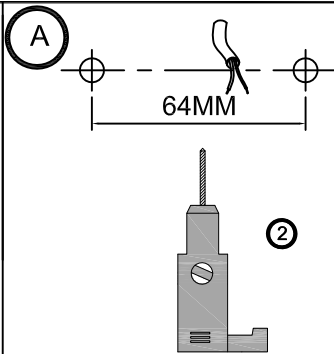




REF.: C1260/NEG
C1260/ORO
C1260/PAV

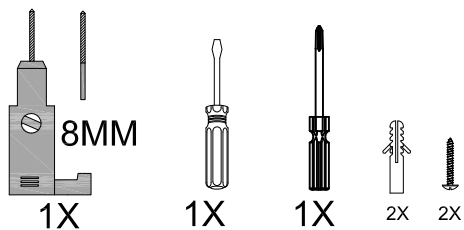


B

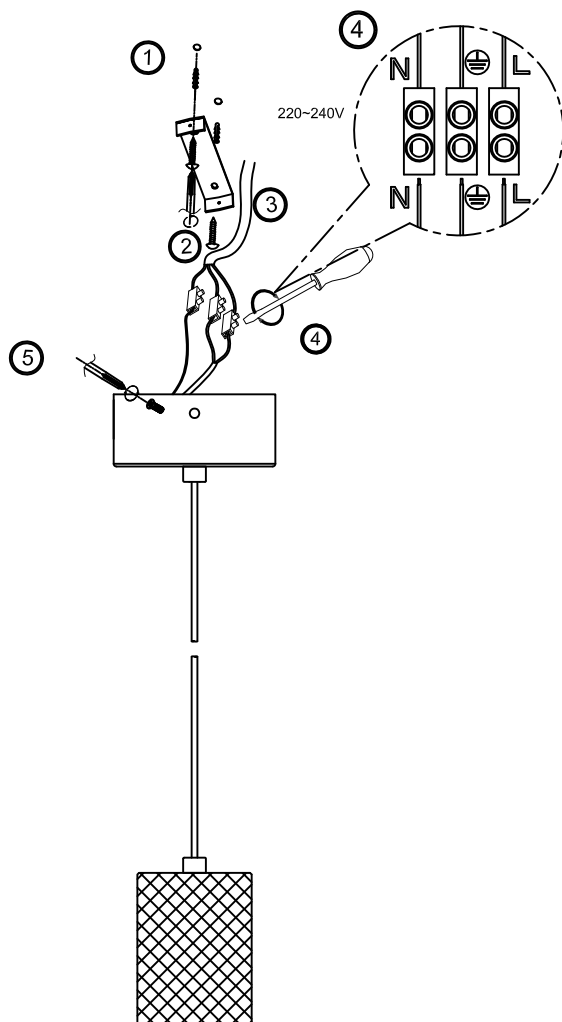

C


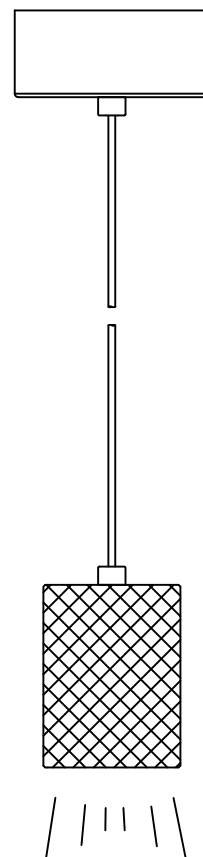


Wiring Instruction of the Push Dimming

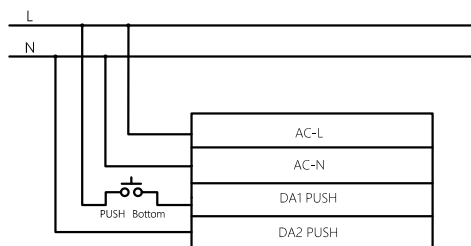

Operation Instructions of DALI Dimming

- Factory default setting is of 100% brightness.
- Connect the DALI signal to the DA1 and DA2 terminals.
- DALI protocol includes 16 groups and 64 IP addresses.
- The minimum dimming depth of the DALI dimming is 0.1%(Iout).

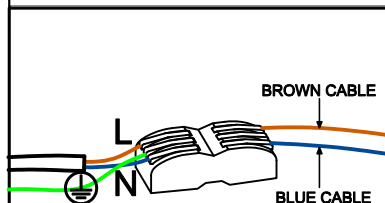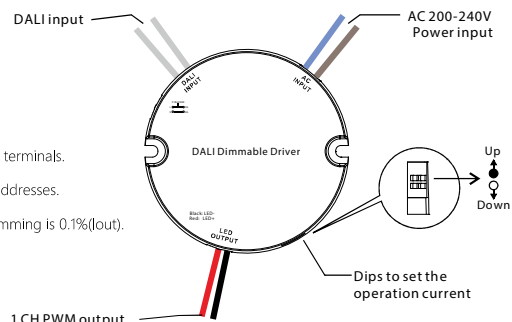

Solo par uso en interiores / Indoor use only

Fuente de luz NO reemplazable / Light source NON-replaceable

aromas

